


AKG-6W

Low cost 6W Ku-Band BUCs



FEATURES:

- Low Cost Solution
- Extreme Efficiency, Stability, Reliability and Performance
- Hyper-Light Package, Only 1 lbs
- Super Low Power Consumption (23W* @6W)
- Fan-less Design
- Exceeds ALL IESS-308/309 Phase Noise Standards
- 3-Year Warranty

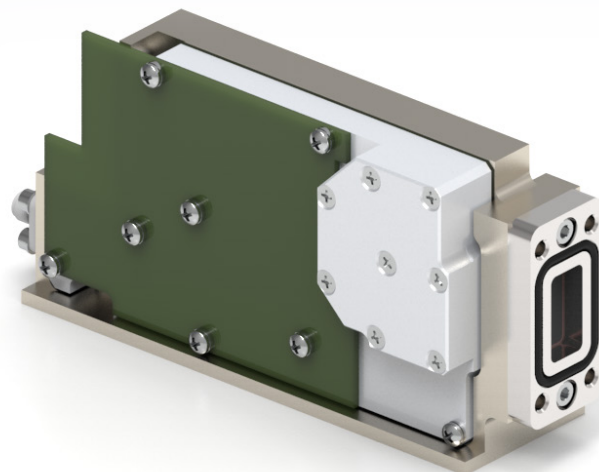

DESIGN OVERVIEW:

The low cost “FANLESS SLIM NON-IP” series Ku-Band BUCs are the next generation of the World’s Most efficient and compact size BUCs in the industry, weighing only 1 lbs and handling output power of 6W at the Ku-Band frequencies. We’ve picked the most mature, reliable and proven to be highly efficient amplifiers with internal overdrive protection. Each unit is vigorously tested at our California facility according to our ATP (Acceptance Testing Procedure).

PERFORMANCE SPECIFICATIONS

Operating RF Frequency	AKSG 14.0 - 14.5 GHz
	AKUG 13.75 - 14.5 GHz
	AKDG 13.75 - 14.5 14.0 - 14.5 GHz
Operating IF frequency	950 - 1700 950 - 1450 MHz
Local Oscillator	12.80 13.05 GHz
Rated Output Power PSAT	6W 37.8 dBm
Linear Power SR @-26 dBc PLIN	5W 37.0 dBm
IMD3 (two tones) 3 dB Back Off	-25 dBc max.
	2 signal 5 MHz apart at P-LINEAR
Spectral Regrowth at P-LINEAR (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2 dB back-off from rated power)	-30 dBc

SPURIOUS & PHASE NOISE

In-Band/Out-band Spurious	-60 dBc max.	
Group Delay	Ripple 1 nsec point to point max.	
AM/PM Conversion	1.0°/dB max. at 3 dB output backoff	
Noise Power Density (TX)	-85 dBm/Hz	
Noise Power Density (RX)	-155 dBm/Hz (10.95 - 12.75 GHz)	
Phase Noise (Up Converter) (Ext. Ref.)	-55 dBc/Hz @ 10 Hz	-115 dBc/Hz
	-65 dBc/Hz @ 100 Hz	-135 dBc/Hz
	-75 dBc/Hz @ 1 kHz	-150 dBc/Hz
	-85 dBc/Hz @ 10 kHz	-155 dBc/Hz
	-95 dBc/Hz @ 100 kHz	-160 dBc/Hz

POWER CONSUMPTION

6W 37.8 dBm PSAT	23W
5W 37.0 dBm PLIN	12W

COMPLIANCE INFORMATION

MIL-STD-188/164C	DO-160G	ROHS, REACH, WEEE
MIL-STD-461E		

PROTECTION

VOLTAGE	OVERTEMP	CURRENT
SMART ALARMS IN THE M&C	MICROPHONIC	

ENVIROMENT SPECIFICATIONS

Environmental MIL-STD	Compliant with MIL-STD810E
Vibration MIL-STD	MIL-STD810F, Method 514.5 C-2 Transport
Operating Temperature Range	- 40° C to + 70° C
Storage Temperature Range	- 60° C to + 85° C
Humidity	100% Condensing, IP67
Shock	20 g peak, 11 msec, 1/2 sine
Altitude	50,000 ft, 15,240 m

M&C INTERFACE

Advanced Monitor & Control	RS232 (RS485, Ethernet Web Page Based, Telnet)*
ALARMS	PLL LOCK, HPA, MUTE, TX
Stealth PLIN Operation Mode	LED Shut-Off Silenced fan

PART NUMBERING SYSTEM

S - Slim Size Series
F - Fan-less Series
G - Fan-less and Slim Series
KU - Universal Ku-Band 13.75 - 14.50 GHz
KS - Standard Ku-Band 14.0 - 14.50 GHz
KL - Low Ku-Band 12.75 - 13.25 GHz
KD - Dual Ku-Band 13.75 - 14.50 GHz | 14.0 - 14.50 GHz
6 | 8 | 10 | 12 | 16 | 20 - Rated Power in Watts
N | F - 50 Ohm or 75 Ohm IF Input Connector Type
M1 - M&C Option RS232 Only
M2 * - RS232/485, Ethernet, SNMP, Telnet
E - Power through MC connector
R - 10 MHz Ref. Auto Sense | Internal Reference
B - Custom Label
H - High Gain +5 dB
U - Universal Mounting Bracket
C xxxx - Custom RAL Color Code
X - Custom Cable

* Advanced M&C option coming soon

INPUT|OUTPUT INTERFACE


IF Connector	N-type (50 Ohm) F-type (75 Ohm)
Universal Prime Power via IF	+ 18 - 55 VDC
Output Interface	WR75 Sealed & Grooved

GAIN

Gain (Temperature Compensated)	55 dB (min) 60 dB (typ.)
TX Gain Flatness	± 0.75 dB max. over 40 MHz
TX Gain variation 50 MHz	± 0.5 dB
TX Gain variation 500 MHz	± 1.5 dB

MECHANICAL SPECIFICATIONS

Dimensions	5.46" x 2.52" x 1.575" (139 x 64 x 40mm)
Weight	Less than 1 lbs (0.45 kg)

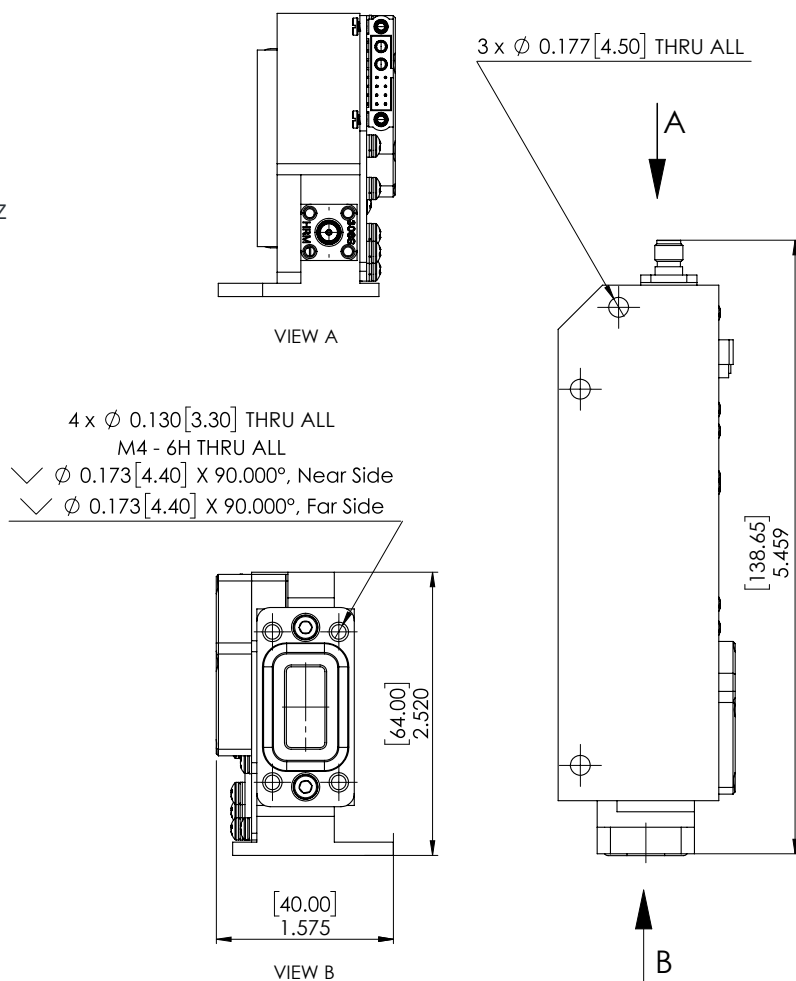

Visit Product Page

Amkom Design Group Inc.

2892 S Santa Fe Ave, Bldg, 115 San Marcos CA 92069